
marey[®]

TEMPERATURE MAP

CHOOSE YOUR MAREY TANKLESS WATER HEATER BASED ON YOUR CLIMATE

To find the best model for you and identify the unit's capacity match your location on the map with the table on the right.

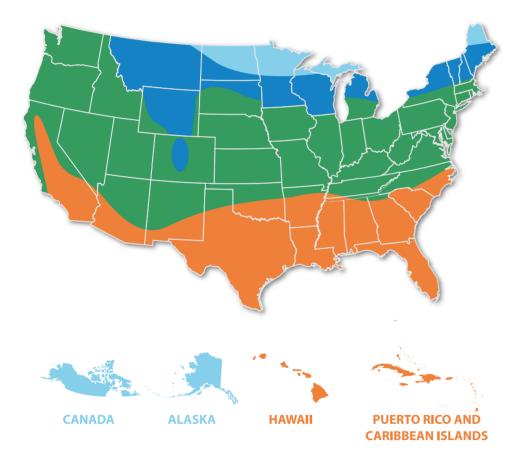

POINTS OF USE GPM PRODUCT INLET 'F PRODUCT GPM POINTS OF USE	ELECTRIC UNITS				GAS UNITS		
• 2.8 • 4.5 • PP15 • 4.5 • PP24 • 35°F • GA14 NG/LP • GA20 NG/LP • GA20 NG/LP • GA26 ONG/OLP 8.8 • • • • • • • • • • • • •	POINTS OF USE	GPM	PRODUCT	INLET °F	PRODUCT	GPM	POINTS OF USE
 a.6. EC0110	S	4.0	EC0180	35°F	GA14 NG/LP GA20 NG/LP GA24 NG/LP	4.6 6.87 8.34	
Image: Second state of the second s	2 3 3 8 9	1.8 2.3 2.5 3.0	PP12 PP15 EC0150 EC0180	45°F	GA10 FNG/FLP GA14 NG/LP GA16 OLPDP GA16 ONGDP GA20 NG/LP GA24 NG/LP	2.6 6.9 3.62 3.83 5.7 7.1	
 1.2 PP8 1.0 PP220 PP12 1.2 PP12 1.25 EC0110 EC0150 EC0150 EC0150 EC0150 EC0150 EC0180 EC0180	0 0 0 0 0 0 0 0 0	1.5 1.4 1.5 1.7 1.8 2.5	PP220 PP12 EC0110 EC0150 PP15 EC0180	55°F	GA5 FNG/FLP GA10 FNG/FLP GA14 NG/LP GA16 OLPDP GA16 ONGDP GA20 NG/LP GA24 NG/LP	1.2 2.1 2.9 2.96 3.13 4.5 5.9	
		1.0 1.2 1.25 1.5 1.6 2.0	PP220 PP12 EC0110 EC0150 PP15 EC0180	65°F	GA5 FNG/FLP GA10 FNG/FLP GA14 NG/LP GA16 OLPDP GA16 ONGDP GA20 NG/LP GA24 NG/LP	1.0 1.8 2.5 2.11 2.23 3.8 5.5	
	SHOWER WORKING ON 1.5 GPM AND SINK FAUCET WORKING ON 1.0 GPM						
RESOLIS DASED ON AN OUTLET TEWFERATORE OF TUS F							

TYPICAL GPM REQUIREMENTS FOR VARIOUS FIXTURES

Shower

Bathtub

Hand Washing Sink						
Washing Machine						
Residential Dishwasher						
Residential Kitchen Sink						

0.5 - 1.0 GPM	
1.0 - 1.5 GPM	
1.0 - 2.0 GPM	
1.5 - 2.0 GPM	

1.5 - 2.0 GPM Utility Faucet 1.5 - 2.0 GPM 4.0 - 5.0 GPM

PROPER SIZING EXAMPLE

1.0 GPM

2.0 GPM

Bathroom Lavatory Sink Standard Shower

TOTAL GPM DEMAND

Running at the same time 3.0 GPM

1 (855) 627 3955

marey.com

customerservice@marey.com